


# RUSTICO COMBO




RUSTICO 4-PIECE COMBO:  
Marble Blend (Random)

Circles: RUSTICO CIRCLE KITS:  
Granite City Blend and Charcoal

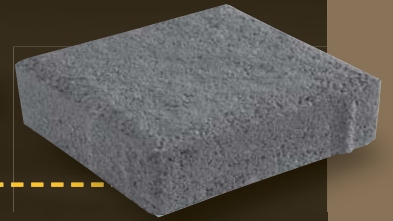

**NICOLOCK**  
paving stones & retaining walls



new york • new jersey • new england • maryland

# RUSTICO COMBO

Manufactured by:

**nicolock**  
paving stones & retaining walls

**ADD  
RUSTICO CIRCLE  
TO YOUR  
DESIGN!**

## Features

- Multi-size rectangular shapes • Slightly dimpled surface
- Chamfered edges • Square corners



## Specifications

	width	length	thickness	pcs./s.f.	s.f./pallet	pcs./pallet	lbs./pallet
<b>A</b>	3"	6"	2-3/8"	-	117	100	3,276
<b>B</b>	6"	6"	2-3/8"			100	
<b>C</b>	6"	9"	2-3/8"			160	
<b>B</b>	9"	9"	2-3/8"			40	

6x6 and 6x9 also sold separately. \* denotes premium color


## Color Selections



### INSTALLATION GUIDELINES: SAND

After excavation, compact the subgrade and install a woven separation fabric. Spread and compact a base of clean, graded, dense aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screeded 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints.

### CROSS-SECTION OF TYPICAL INSTALLATION

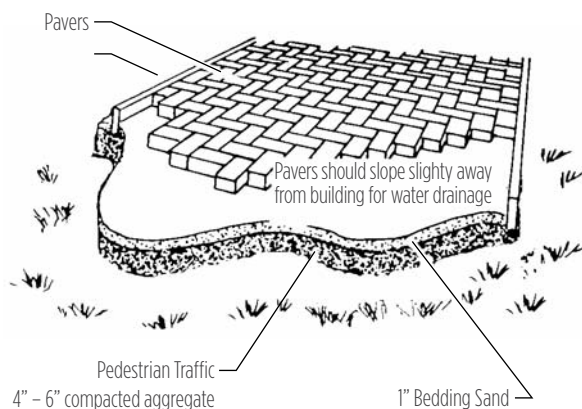

**CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.**



### Nicolock's Paver-Shield™

- Ultra-dense surface with more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are guaranteed not to fade!

**CAUTION: Always use a plate compactor with a pad when installing textured paving stones.**

**NOTE:** All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.