

SPEC- THERMAL™ INSULATED MASONRY

Featuring Korfil Hi-R H

New Design with Reduced Thermal Bridging for Enhanced Thermal Resistance

Capable of meeting IECC (2009) R-Value Thresholds in all Climate Zones

Permits full grout and reinforcement of wall without removing insulation

Provides Moisture Protection of a Barrier Wall

Work by other trades is performed with little danger of damage to insulation

Shape permits efficient installation even with placement over reinforcement for fully grouted walls.



 CONCRETE
PRODUCTS
GROUP

INNOVATIVE CONCRETE
MASONRY SYSTEMS

High Performance Insulated Masonry Walls

The **Hi-R H Wall System** is a specially designed concrete masonry unit and individually molded insulation insert that provide industry best thermal performance in compliance with prevailing Codes and Standards. The **Hi-R H** Masonry Unit has been designed to provide reduced thermal bridging even more than prior Hi-R designs. The block and the insulation are combined at the block manufacturing plant prior to delivery to the job site. The assembly provides a wall system capable of achieving higher thermal R-values than conventional masonry, while providing full Code-based load resistance.

Insulation Inserts

Hi-R H Inserts are made by **Concrete Block Insulating Systems, Inc.** from flame-retardant treated expandable polystyrene. Like all foamed plastics, good fire procedures must be followed during storage and installation. Inserts give off no toxic products of combustion, except carbon monoxide and carbon dioxide, concentrations of which are far less than those given off by equal volumes of more dense building construction products. Expandable polystyrene contains no fluorocarbons and no formaldehyde.


Masonry Units

Hi-R H Masonry Units from the **Concrete Products Group, LLC** are available in precision faced and architectural decorative faced units. Unit sizes are available in 10 and 12 inch widths with nominal 8 inch x 16 inch face dimensions. Check for availability in your region.

Applicable Standards

ASTM C 578, Type X, replacing Federal Specifications HH-I-524C. Specification for Rigid Cellular Polystyrene Thermal Insulation.

ASTM C 90 Standard Specification for Load-bearing Concrete Masonry Units.

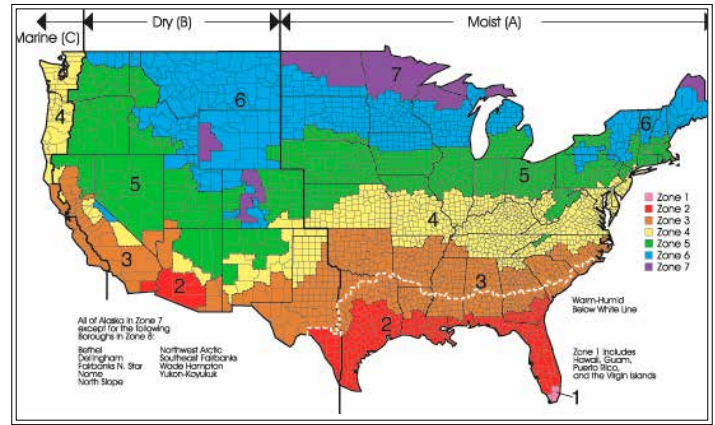

International Energy Conservation Code Climate Zones

The Hi-R H Wall System allows the construction of single wythe masonry walls that meet the stringent R-Value requirements of the 2009 IECC in all climate zones

MAXIMUM U-FACTORS FOR MASS WALLS PRESCRIPTIVE REQUIREMENTS (2009 IECC)		
	All Other	Group R
Zone 1	U-0.58	U-0.151 ^a
Zone 2	U-0.151 ^a	U-0.123
Zone 3	U-0.123	U-0.104
Zone 4 (except Marine)	U-0.104	U-0.090
Zone 5 (& Marine 4)	U-0.090	U-0.080
Zone 6	U-0.080	U-0.071
Zone 7	U-0.071	U-0.071
Zone 8	U-0.071	U-0.052

IECC (2009): Section 502.1 General (Prescriptive) Requirements and Table 502.1.2 BUILDING ENVELOPE REQUIREMENTS OPAQUE ELEMENT, MAXIMUM U-FACTORS. ^a Certain exceptions apply.



The Two-Piece CBIS Korfil Hi-R H inserts form a lap joint with adjacent inserts, both above and below and from side to side, for maximum insulation efficiency.

Please visit
www.concreteproductsgroup.com
 for design and construction
 resources including CAD details,
 design and construction videos
 and technical notes.

THERMAL PROPERTIES:

The Values below are for Pre-insulated Hi-R H Masonry Units.¹ The Thermal Properties tables show the thermal resistance (R_t), including inside and outside air surface resistances of 0.68 and 0.17 hr-ft²-°F/BTU, respectively, and the U-values for the various densities of concrete masonry units indicated. U Values are based on conventional 3/8" Mortar Joint Construction. U-Value units are Btu/hr/sqft/Deg.F. The results below are calculated based on the results of a third party thermal analysis that was completed making use of the Hot Box Test Data from three accredited laboratory services. A complete Engineering Report dated November 20, 1996, including Addendum Added Nov. 1, 2002, is available upon request. It covers the thermal values of the Hi-R Masonry Wall System.

10" Wide Hi-R H Wall System						
Density of Block lbs/ft ³	Wall Type 1*		Wall Type 2**		Wall Type 3***	
	R_t	U	R_t	U	R_t	U
80	17.05	0.059	18.45	0.054	19.88	0.050
95	14.99	0.067	16.39	0.061	17.82	0.056
100	14.31	0.070	15.71	0.064	17.14	0.058
110	12.99	0.077	14.39	0.070	15.82	0.063
120	11.71	0.085	13.11	0.076	14.54	0.069
125	11.11	0.090	12.51	0.080	13.94	0.075
135	9.96	0.100	11.36	0.088	12.79	0.078

12" Wide Hi-R H Wall System						
Density of Block lbs/ft ³	Wall Type 1*		Wall Type 2**		Wall Type 3***	
	R_t	U	R_t	U	R_t	U
80	18.417	0.054	19.82	0.050	21.247	0.047
95	16.337	0.061	17.74	0.056	19.167	0.052
100	15.647	0.064	17.05	0.059	18.477	0.054
110	14.297	0.070	15.70	0.064	17.127	0.058
120	12.987	0.077	14.39	0.070	15.817	0.063
125	12.347	0.081	13.75	0.073	15.177	0.066
135	11.137	0.090	12.54	0.080	13.967	0.072

* Wall Type 1: Hi-R H Wall System only; **Hi R H Units with fully grouted cells** (125 lb./ft³ density grout).

** Wall Type 2: Hi-R H Wall System, **Hi R H Units with fully grouted cells** (125 lb./ft³ density grout); 1/2 inch gypsum board on furring strips.

*** Wall Type 3: Hi-R H Wall System, **Hi R H Units with fully grouted cells** (125 lb./ft³ density grout); 1/2 inch foil-backed gypsum board on furring strips.



Hi-R H units are suitable for construction of bond beams without the need for any modifications to the units and the insulation inserts remain fully in place



Insulated corners are built using conventional masonry fittings and Hi-R H units



Nationwide Availability

The Concrete Products Group LLC (CPG) consists of regional market leaders in the concrete products industry. The CPG is organized to provide consistent, top-quality products to regional and national customers.

800-789-0872

A. JANDRIS & SONS
202 High St.
Gardner, MA 01440

ALLIED CONCRETE PRODUCTS
LLC
3900 Shannon St.
Chesapeake, VA 23323-1054

AMCON BLOCK
P.O. Box 546
2211 Hwy 10 South
St. Cloud, MN 56302-0546

BARNES & CONE
P.O. Box 280
5894 Court St. Rd.
Syracuse, NY 13206-0280

BASALITE
CONCRETE
PRODUCTS LLC
605 Industrial Way
Dixon, CA 95620

BLOCK USA
P.O. Box 100813
2570 Ruffner Rd.
Birmingham, AL 35210

FIZZANO BROTHERS
CONCRETE
PRODUCTS, INC.
1776 Chester Pike
Crum Lynne, PA
19022-1299

HEADWATERS
CONSTRUCTION
MATERIALS
7620 Washington Ave.
Houston, TX
77007


JOHNSON
CONCRETE
COMPANY
217 Klumac Road
Salisbury, NC 28144

MIDWEST
PRODUCTS GROUP
12901 St. Charles Rock Rd.
Bridgeton, MO
63044-2485

OBERFIELDS, LLC
P.O. Box 362
528 London Rd.
Delaware, OH 43015

ORCO BLOCK CO., INC.
11100 Beach Blvd.
Stanton, CA
90680-0129

WESTERN BLOCK
COMPANY
4021 19th Ave. S.
Phoenix, AZ
85041

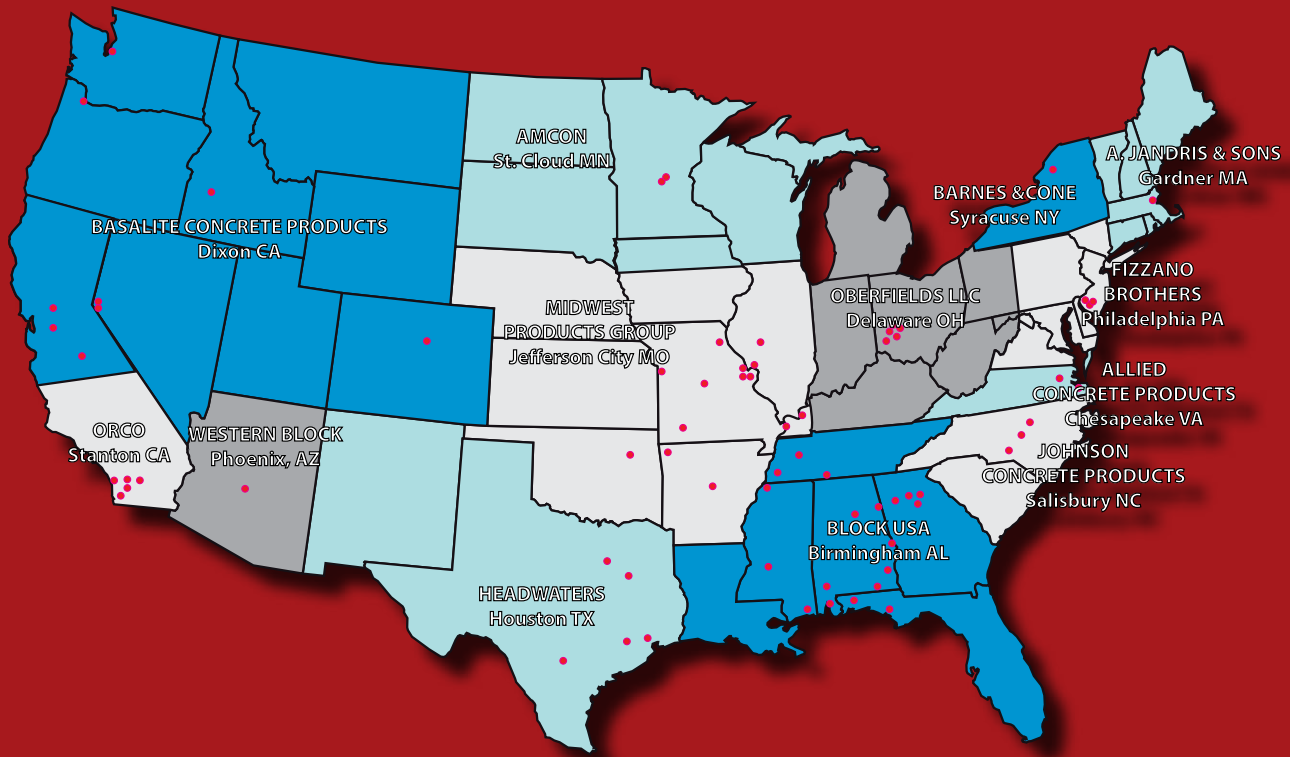

Manufacturing Locations



Hi-R is a registered trademark of CONCRETE BLOCK INSULATING SYSTEMS, INC.